


TABLICA SA KARAKTERISTIČNIM MERAMA ZA KOTLOVE ŠUKOPLAM LUX 15-80kW

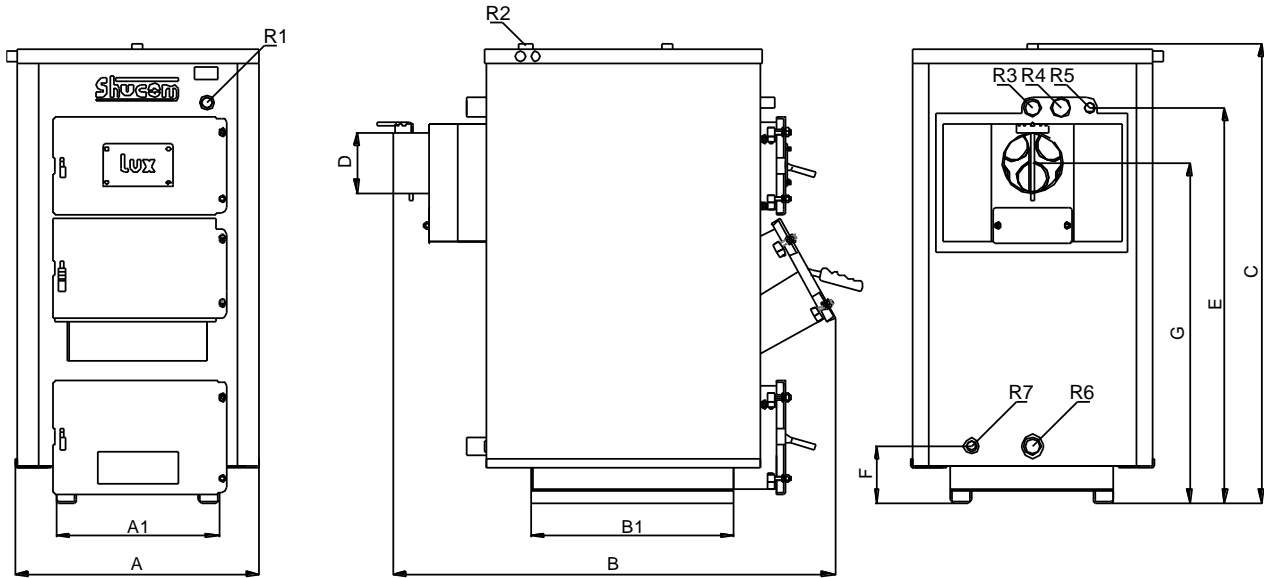

Kotao	Snaga kotla kW		DIMENZIJE PRIKLJUČAKA							DIMENZIJE KOTLA (mm)									Sadržaj vode u kotlu (l)
	Drvo	Ulje	R1	R2	R3	R4	R5	R6	R7	A1	B1	A	B	C	D	E	F	G	
Plam 15LUX	15	15	3/4"	1"	5/4"	5/4"	1/2"	5/4"	1/2"	350	350	550	690	1030	140	860	170	730	97
Plam 18LUX	18	18	3/4"	1"	5/4"	5/4"	1/2"	5/4"	1/2"	350	350	550	740	1090	140	920	170	785	108
Plam 20LUX	20	22	3/4"	1"	5/4"	5/4"	1/2"	5/4"	1/2"	350	425	550	815	1090	160	920	170	785	115
Plam 25LUX	25	27	3/4"	1"	5/4"	5/4"	1/2"	5/4"	1/2"	400	500	600	1075	1200	160	1010	170	860	120
Plam 30LUX	30	34,5	3/4"	1"	5/4"	5/4"	1/2"	5/4"	1/2"	470	530	670	1080	1295	160	1095	170	940	140
Plam 40LUX	40	46	3/4"	1"	5/4"	5/4"	1/2"	5/4"	1/2"	470	580	670	1130	1295	180	1095	170	940	165
Plam 50LUX	50	57,5	3/4"	1"	5/4"	5/4"	1/2"	5/4"	1/2"	500	650	700	1200	1295	180	1095	170	940	190
Plam 65LUX	65	74,8	3/4"	1"	6/4"	5/4"	1/2"	6/4"	1/2"	530	750	730	1280	1295	200	1140	170	990	245
Plam 80LUX	80	92	3/4"	1"	6/4"	5/4"	1/2"	6/4"	1/2"	530	800	730	1330	1330	200	1170	170	1015	280

*Proizvođač zadržava pravo na izmene dimenzija

Kotao	Potrebna promaja (Pa)	Radni pritisak (bar)	Težina kotla (kg)	Površina za grejanje (m ²)			Orijentacione dimenzije dimnjaka	
				A	B	C	Prečnik (mm)	Visina (m)
Plam 15LUX	28	2,5	170	70	92	140	150	6
Plam 18LUX	28	2,5	200	85	114	170	150	6
Plam 20LUX	27	2,5	220	100	135	190	160	6
Plam 25LUX	28	2,5	272	125	168	250	160	6
Plam 30LUX	28	2,5	297	150	200	300	160	7
Plam 40LUX	28	2,5	323	200	270	400	160/180	9/7
Plam 50LUX	30	2,5	360	250	335	500	180/200	10/8
Plam 65LUX	34	2,5	420	325	435	650	220	10
Plam 80LUX	37	2,5	465	400	536	800	220	12

NAPOMENA:

A - slabo izolovani objekti visina prostorija do 3m

B - dobro izolovani objekti visina prostorija do 3m (izolacija 5cm)

C - izuzetno dobro izolovani objekti visina prostorija do 3m (izolacija 10cm)