



**TABLICA SA KARAKTERISTIČNIM MERAMA
ZA KOTLOVE PRIMULA R 18-465kW**

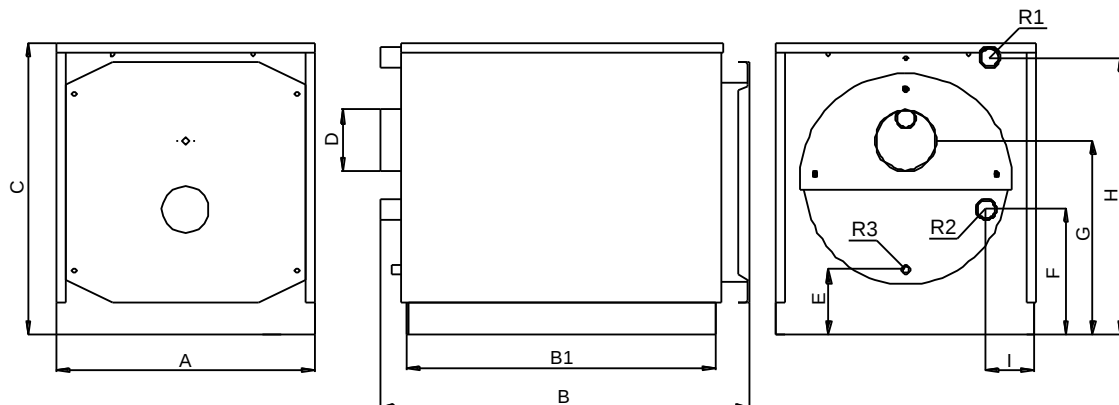

Kotao	Snaga kotla kW	DIMENZIJE PRIKLJUČAKA		DIMENZIJE KOTLA (mm)										Sadržaj vode u kotlu (l)	Otpor ložišta (Pa)	Radni pritisak (bar)	Težina kotla (kg)
		R1/R2	R3	A	B1	B	C	D	E	F	G	H	I				
Primula R 22	18-26	5/4"	1/2"	550	550	650	630	120	155	300	415	570	105	22	20	2,5	113
Primula R 29	25-34	5/4"	1/2"	550	550	650	680	120	165	310	425	620	105	34	30	2,5	154
Primula R 36	38-42	5/4"	1/2"	550	550	650	680	120	165	310	425	620	105	34	35	2,5	171
Primula R 46	42-54	6/4"	1/2"	625	750	880	730	150	155	300	465	665	110	50	40	2,5	205
Primula R 60	54-70	6/4"	1/2"	625	750	880	780	150	165	310	465	715	110	60	45	2,5	251

*Proizvodjač zadržava pravo na izmene dimenzija

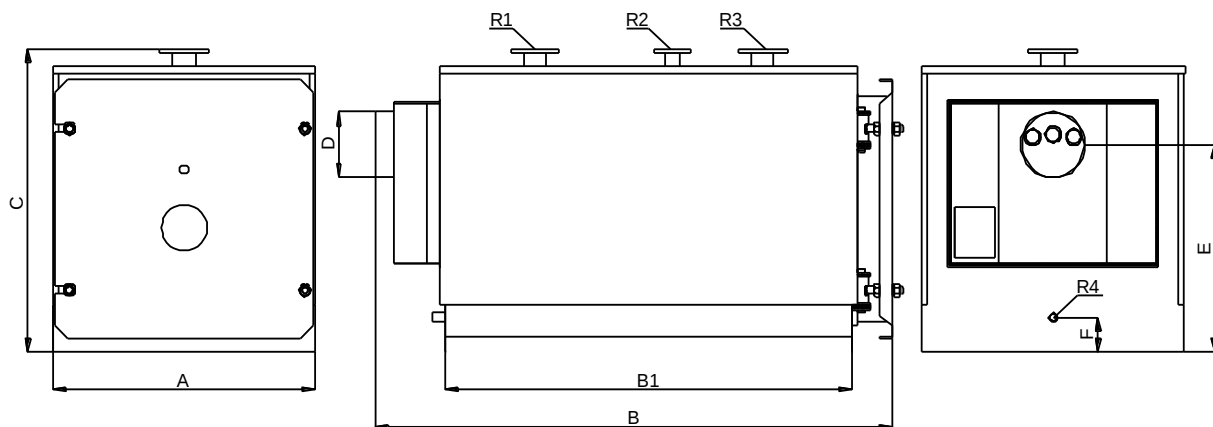

Kotao	Snaga kotla kW	DIMENZIJE PRIKLJUČAKA			DIMENZIJE KOTLA (mm)							Sadržaj vode u kotlu (l)	Otpor ložišta (Pa)	Radni pritisak (bar)	Težina kotla (kg)
		R1/R3	R2	R4	A	B1	B	C	D	E	F				
Primula R 80	60-85	DN50 NP6	5/4"	5/4"	765	850	1170	935	200	510	80	122	55	3	324
Primula R 99	74-106	DN50 NP6	5/4"	5/4"	765	850	1170	935	200	510	80	130	67	3	360
Primula R 120	90-128	DN65 NP6	5/4"	5/4"	765	1180	1350	935	200	510	80	138	88	3	400
Primula R 150	112-160	DN65 NP6	5/4"	5/4"	765	1180	1350	935	200	510	80	152	102	3	443
Primula R 180	135-193	DN65 NP6	6/4"	5/4"	875	1430	1600	985	220	510	80	200	120	3	585
Primula R 210	157-224	DN65 NP6	6/4"	5/4"	875	1430	1600	985	220	510	80	218	180	3	650
Primula R 250	188-268	DN80 NP6	2"	5/4"	875	1660	1850	985	250	510	80	280	220	3	725
Primula R 300	280-320	DN80 NP6	2"	5/4"	875	1660	1850	985	250	510	80	340	250	3	807
Primula R 350	245-350	DN80 NP6	DN50 NP16	3/4"	1030	1580	1960	1170	250	780	130	340	210	3	690
Primula R 400	350-465	DN80 NP6	DN50 NP16	3/4"	1050	1645	2035	1210	250	650	150	500	230	3	990

*Proizvodjač zadržava pravo na izmene dimenzija