


TABLICA SA KARAKTERISTIČNIM MERAMA ZA KOTLOVE ŠUKOPLAM NP 100-900kW



KOTAO	Snaga/ Produkcija pare kW / kg/h	DIMENZIJE PRIKLJUČAKA								DIMENZIJE KOTLA (mm)								
		R1	R2	R3	R4	R5	R6	R7	R8/R9	A1	B1	A	B	C	D	E	F	F1
Plam 100 NP	100 / 144	3/4"	3/8"	1/2"	3/4"	DN32 NP6	DN80 NP6	DN32 NP16	DN20 NP25	550	850	730	1375	1840	200	1040	250	120
Plam 125 NP	125 / 180	3/4"	3/8"	1/2"	3/4"	DN32 NP6	DN80 NP6	DN40 NP16	DN20 NP25	620	900	800	1425	1970	200	1288	255	105
Plam 150 NP	150 / 216	3/4"	3/8"	1/2"	3/4"	DN32 NP6	DN80 NP6	DN40 NP16	DN20 NP25	670	1000	850	1525	2190	240	1240	250	130
Plam 175 NP	175 / 252	3/4"	3/8"	1/2"	3/4"	DN32 NP6	DN80 NP6	DN50 NP16	DN20 NP25	670	1100	850	1625	2190	260	1320	250	100
Plam 200 NP	200 / 288	3/4"	3/8"	1/2"	3/4"	DN50 NP6	DN80 NP6	DN50 NP16	DN20 NP25	900	1100	1050	1625	2175	300	1250	260	110
Plam 250 NP	250 / 360	3/4"	3/8"	1/2"	3/4"	DN50 NP6	DN100 NP6	DN65 NP16	DN20 NP25	920	1260	1070	1750	2320	350	1448	250	120
Plam 300 NP	300 / 432	3/4"	3/8"	1/2"	3/4"	DN50 NP6	DN100 NP6	DN65 NP16	DN20 NP25	1020	1230	1180	1750	2550	350	1535	250	170
Plam 350 NP	350 / 505	3/4"	3/8"	1/2"	3/4"	DN50 NP6	DN100 NP6	DN65 NP16	DN20 NP25	1120	1230	1280	1750	2715	350	1615	250	170
Plam 400 NP	400 / 576	3/4"	3/8"	1/2"	3/4"	DN50 NP6	DN125 NP6	DN65 NP16	DN20 NP25	1180	1320	1340	1840	3030	400	1705	250	170
Plam 500 NP	500 / 720	3/4"	3/8"	1/2"	3/4"	DN50 NP6	DN150 NP6	DN80 NP16	DN20 NP25	1220	1500	1380	2020	3290	430	2100	245	120
Plam 550 NP	550 / 792	3/4"	3/8"	1/2"	3/4"	DN50 NP6	DN150 NP6	DN80 NP16	DN20 NP25	1220	1650	1380	2170	3290	430	2105	250	120
Plam 750 NP	750 / 1080	3/4"	3/8"	1/2"	3/4"	DN50 NP6	DN150 NP6	DN80 NP16	DN20 NP25	1420	1750	1580	2300	3900	480	2225	245	100
Plam 900 NP	900 / 1296	3/4"	3/8"	1/2"	3/4"	DN50 NP6	DN200 NP6	DN100 NP16	DN20 NP25	1470	1870	1675	2530	3980	480	2615	245	100

KOTAO	Sadržaj vode u kotlu (l)	Potrebna promaja (Pa)	Radni pritisak (bar)	Težina kotla (kg)	Orijentacione dimenzije dimnjaka	
					Prečnik (mm)	Visina (m)
Plam 100 NP	310	40	0,5	780	250	12
Plam 125 NP	355	45	0,5	920	250	15
Plam 150 NP	400	47	0,5	1010	300	15
Plam 175 NP	475	48	0,5	1350	300	15
Plam 200 NP	600	52	0,5	1590	300	18
Plam 250 NP	700	53	0,5	1815	350	18
Plam 300 NP	840	54	0,5	2100	350	18
Plam 350 NP	970	55	0,5	2480	400	18
Plam 400 NP	1200	56	0,5	2760	400	20
Plam 500 NP	1540	58	0,5	3575	450	20
Plam 550 NP	1750	59	0,5	4020	450	20
Plam 750 NP	1990	62	0,5	5625	500	22
Plam 900 NP	2500	70	0,5	6500	500	24

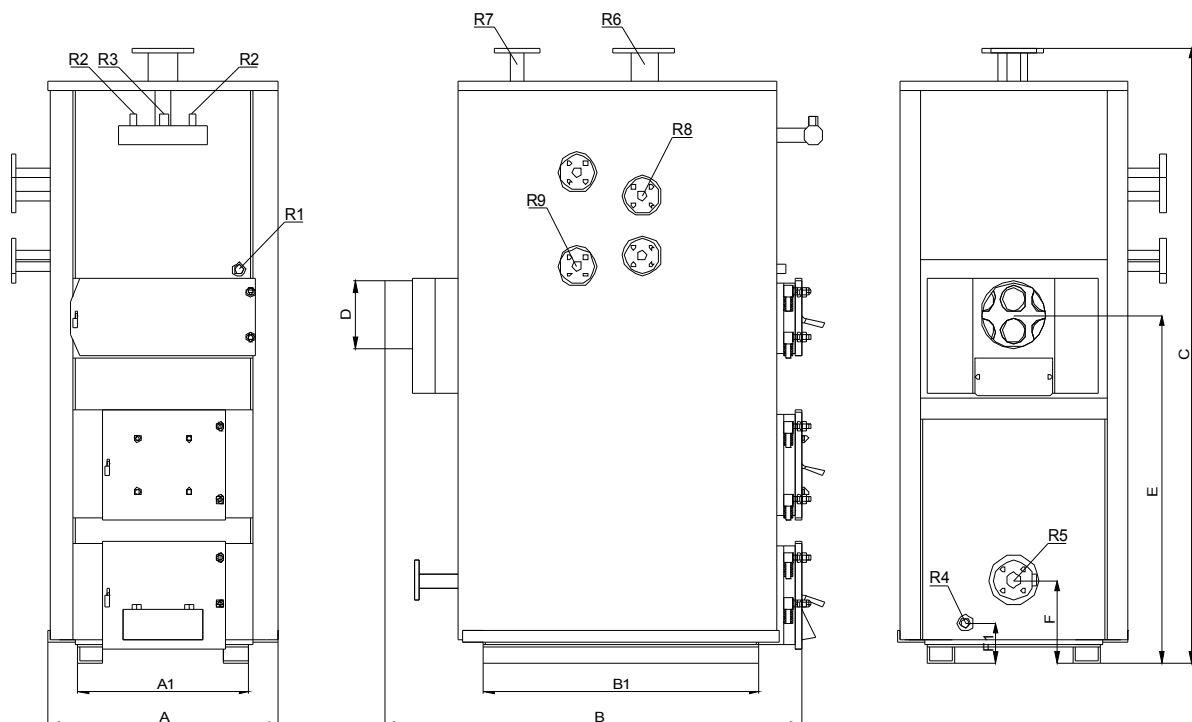