


## TABLICA SA KARAKTERISTIČNIM MERAMA ZA KOTLOVE ŠUKOPLAM BUNKER 100-900kW

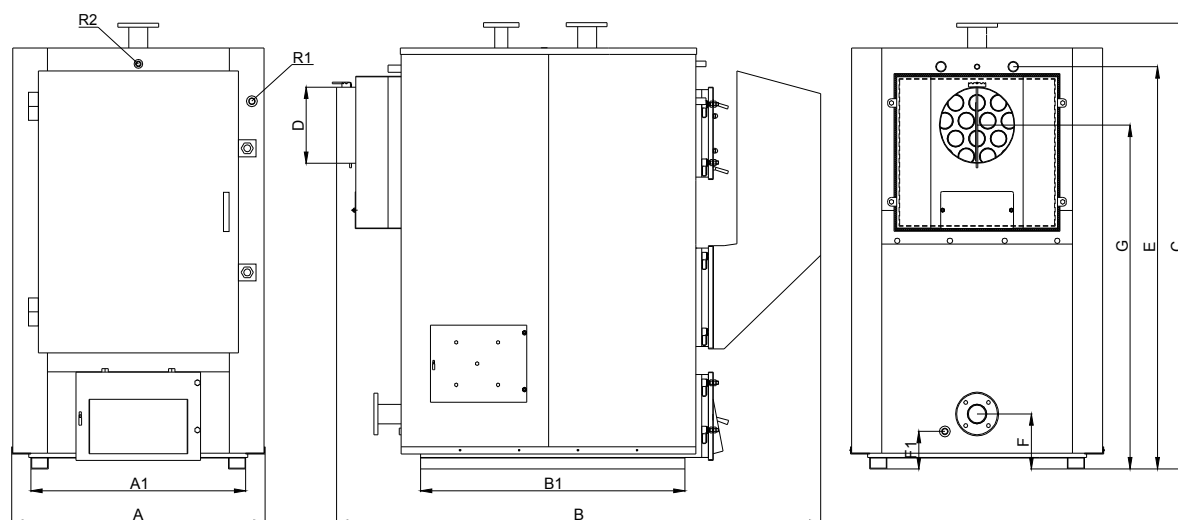

KOTAO	Snaga kotla kW		DIMENZIJE PRIKLJUČAKA								DIMENZIJE KOTLA (mm)								
	Drvo	Ulje	R1	R2	R3	R4 / R6	R5	R7	R8	A1	B1	A	B	C	D	E	F	F1	G
Plam 100	100	115	3/4"	1/2"	3/4"	DN50 NP6	DN25 NP16	5/4"	1/2"	550	850	730	1875	1630	200	1444	250	120	1290
Plam 125	125	144	3/4"	1/2"	3/4"	DN65 NP6	DN32 NP16	5/4"	1/2"	620	900	800	1925	1915	200	1720	255	105	1538
Plam 150	150	172	3/4"	1/2"	3/4"	DN65 NP6	DN32 NP16	5/4"	1/2"	670	1000	850	2025	1935	240	1714	250	130	1490
Plam 175	175	200	3/4"	1/2"	3/4"	DN80 NP6	DN40 NP16	5/4"	1/2"	670	1100	850	2125	1960	260	1777	250	100	1570
Plam 200	200	230	3/4"	1/2"	3/4"	DN80 NP6	DN50 NP16	5/4"	1/2"	900	1100	1050	2125	2040	300	1745	260	110	1500
Plam 250	250	288	3/4"	1/2"	3/4"	DN80 NP6	DN50 NP16	5/4"	1/2"	920	1260	1070	2250	2200	350	1987	250	120	1448
Plam 300	300	350	3/4"	1/2"	3/4"	DN80 NP6	DN50 NP16	1"	1/2"	1020	1230	1180	2250	2300	350	2065	250	170	1700
Plam 350	350	420	3/4"	1/2"	3/4"	DN80 NP6	DN50 NP16	1"	1/2"	1120	1230	1280	2250	2300	350	2145	250	170	1865
Plam 400	400	500	3/4"	1/2"	3/4"	DN80 NP6	DN50 NP16	1"	1/2"	1180	1320	1340	2340	2510	400	2275	250	170	1955
Plam 500	500	600	3/4"	1/2"	3/4"	DN100 NP6	DN50 NP16	1"	1/2"	1220	1500	1380	2520	2930	430	2680	245	120	2350
Plam 550	550	660	3/4"	1/2"	3/4"	DN100 NP6	DN50 NP16	1"	1/2"	1220	1650	1380	2570	2930	430	2695	250	120	2355
Plam 750	750	900	3/4"	1/2"	3/4"	DN100 NP6	DN65 NP16	1"	1/2"	1420	1750	1580	2800	3130	480	2860	245	100	2475
Plam 900	900	1080	3/4"	1/2"	3/4"	DN100 NP6	DN65 NP16	1"	1/2"	1470	1870	1675	2830	3130	480	2865	245	100	2470

KOTAO	Sadržaj vode u kotlu (l)	Potrebna promajna (Pa)	Radni pritisak (bar)	Težina kotla (kg)	Orijentaciona površina za grejanje (m <sup>2</sup> )			Orijentacione dimenzije dimnjaka	
					A	B	C	Prečnik (mm)	Visina (m)
Plam 100	350	40	3	700	500	670	1000	250	12
Plam 125	395	45	3	805	625	840	1250	250	15
Plam 150	440	47	3	890	750	1010	1500	300	15
Plam 175	515	48	3	1175	875	1175	1750	300	15
Plam 200	640	52	3	1390	1000	1340	2000	300	18
Plam 250	740	53	3	1610	1250	1675	2500	350	18
Plam 300	880	54	3	1850	1500	2010	3000	350	18
Plam 350	1110	55	3	2165	1750	2345	3500	400	18
Plam 400	1240	56	3	2400	2000	2680	4000	400	20
Plam 500	1580	58	3	3080	2500	3350	5000	450	20
Plam 550	1790	59	3	3550	2750	3685	5500	450	20
Plam 750	2050	62	3	4885	3750	5025	7500	500	22
Plam 900	2600	70	3	5400	4500	6030	9000	500	24

### NAPOMENA:

A - slabo izolovani objekti visina prostorija do 3m

B - dobro izolovani objekti visina prostorija do 3m (izolacija 5cm)

C - izuzetno dobro izolovani objekti visina prostorija do 3m (izolacija 10cm)