



**TABLICA SA KARAKTERISTIČNIM MERAMA
ZA KOTLOVE PRIMULA R 20-300kW**

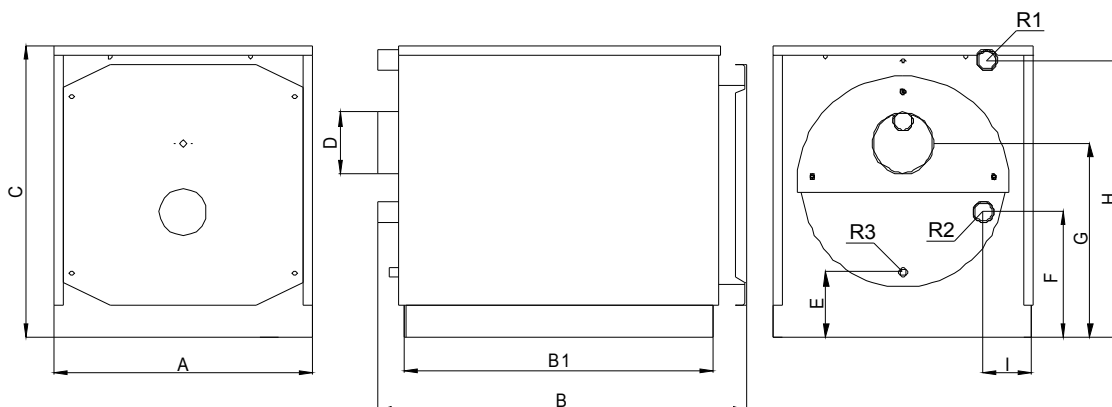

Kotao	Snaga kotla kW	DIMENZIJE PRIKLJUČAKA		DIMENZIJE KOTLA (mm)										Sadržaj vode u kotlu (l)	Otpor ložišta (Pa)	Radni pritisak (bar)	Težina kotla (kg)
		R1/R2	R3	A	B1	B	C	D	E	F	G	H	I				
Primula R 20	18-24	5/4"	1/2"	550	550	650	630	120	155	300	415	570	105	22	20	2,5	80
Primula R 25	22-30	5/4"	1/2"	550	550	650	630	120	155	300	415	570	105	22	25	2,5	85
Primula R 29	26-37	5/4"	1/2"	550	550	650	680	120	165	310	425	620	105	28	30	2,5	96
Primula R 36	32-43	5/4"	1/2"	550	550	650	680	120	165	310	425	620	105	28	35	2,5	103
Primula R 40	36-48	6/4"	1/2"	625	750	880	730	150	155	300	465	665	110	50	37	2,5	135
Primula R 46	41-55	6/4"	1/2"	625	750	880	730	150	155	300	465	665	110	50	40	2,5	141
Primula R 50	45-60	6/4"	1/2"	625	750	880	780	150	165	310	465	715	110	60	42	2,5	150
Primula R 60	54-72	6/4"	1/2"	625	750	880	780	150	165	310	465	715	110	60	45	2,5	158

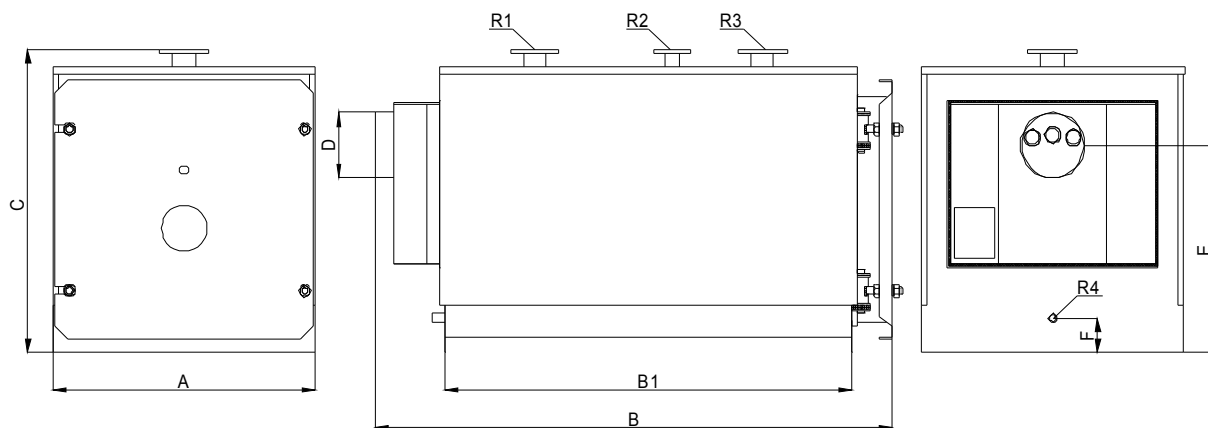

Kotao	Snaga kotla kW	DIMENZIJE PRIKLJUČAKA			DIMENZIJE KOTLA (mm)							Sadržaj vode u kotlu (l)	Otpor ložišta (Pa)	Radni pritisak (bar)	Težina kotla (kg)
		R1/R3	R2	R4	A	B1	B	C	D	E	F				
Primula R 80	72-96	DN50 NP6	5/4"	5/4"	765	1020	1170	935	200	510	80	122	55	3	308
Primula R 99	90-120	DN50 NP6	5/4"	5/4"	765	1020	1170	935	200	510	80	130	67	3	310
Primula R 120	108-144	DN65 NP6	5/4"	5/4"	765	1180	1350	935	200	510	80	138	88	3	378
Primula R 150	135-180	DN65 NP6	5/4"	5/4"	765	1180	1350	935	200	510	80	152	102	3	380
Primula R 180	162-216	DN65 NP6	6/4"	5/4"	875	1430	1600	985	220	510	80	200	120	3	528
Primula R 210	189-252	DN65 NP6	6/4"	5/4"	875	1430	1600	985	220	510	80	218	180	3	530
Primula R 250	225-300	DN80 NP6	2"	5/4"	875	1660	1850	985	250	510	80	280	220	3	638
Primula R 300	270-360	DN80 NP6	2"	5/4"	875	1660	1850	985	250	510	80	320	250	3	640

